


WAC 296-155-56125 Rigging blocks. (1) Rigging blocks must be constructed in accordance with ASME B30.26-2020, Rigging hardware. Rigging blocks manufactured prior to the effective date of this section, must comply with ASME B30.26-2015.

(2) The rigging block components must be fully engaged, with all fasteners and retaining devices in place and in good working order before use.

(3) The rope must be in the sheave groove when the rigging block begins to take load.

(4) The load line multiplied by the block load factor must not exceed the rated load of the rigging block. (See Figure 39, Block Load Factor Multipliers.)

(5) Load line fittings must not contact the rigging block sheave(s).

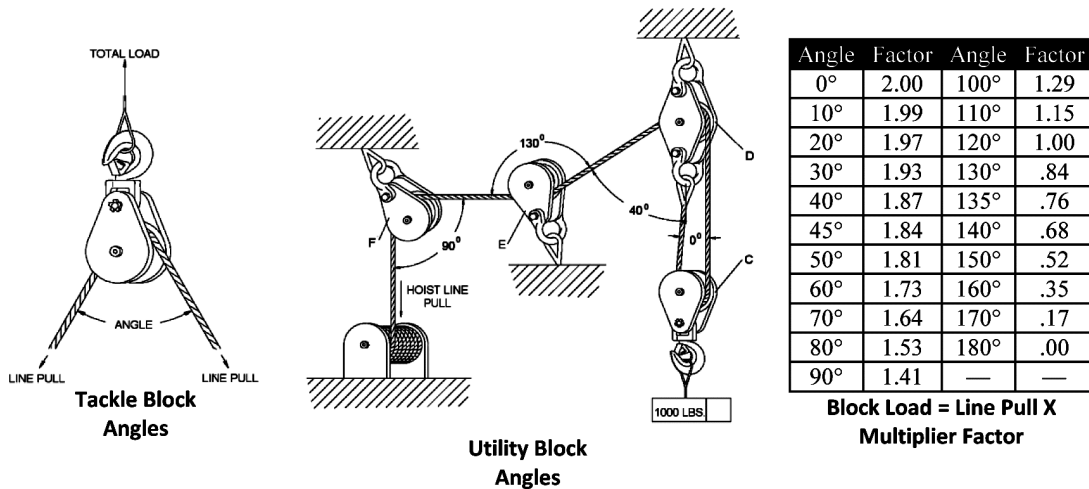

**Figure 39
Block Load Factor Multipliers**

Example: Load = 1,000 lb
Line Pull: 1,000 lb ÷ 2 = 500 lb
Load Block "C" = 500 lb x 2 = 1,000 lb
(line pull x factor for 0 deg. angle)
Load Block "D" = 500 lb x 1.87 + 500 lb = 1,435 lb
(line pull x factor for 40 deg. angle + dead-end load)
Load Block "E" = 500 lb x 0.84 = 420 lb
(line pull x factor for 130 deg. angle)
Load Block "F" = 500 lb x 1.41 = 705 lb
(line pull x factor for 90 deg. angle)

[Statutory Authority: RCW 49.17.010, 49.17.040, 49.17.050, 49.17.060, and chapter 49.17 RCW. WSR 25-16-089, s 296-155-56125, filed 8/5/25, effective 9/5/25. Statutory Authority: RCW 49.17.010, 49.17.040, 49.17.050, 49.17.440, 49.17.060, and 29 C.F.R. 1926, Subpart CC. WSR 12-01-086, § 296-155-56125, filed 12/20/11, effective 2/1/12.]